
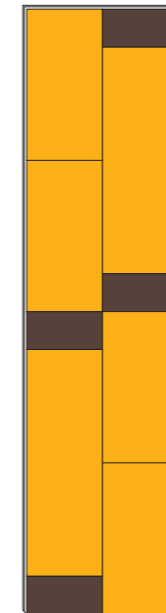



Due colonne per riscaldare con discrezione.

Two columns for discreet heating.
Dos columnas para calentar con discreción.


**Combinazioni disponibili
Available combinations
Combinaciones disponibles**




C/c
H 1600 x L 400 - 761 w/ t 50° K



O/o
H 800 x L 400 - 435 w/ t 50° K

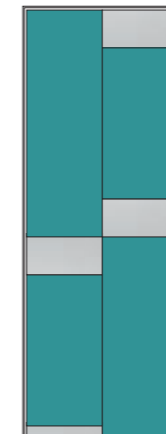

C/o
H 1200 x L 400 - 601 w/ t 50° K

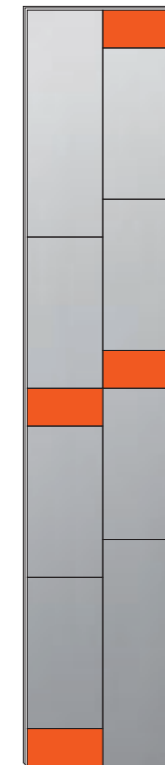

O/c
H 2000 x L 400 - 919 w/ t 50° K

Dimensioni disponibili - available sizes - dimensiones disponibles

H mm	L mm n. colonne - no. of columns - n. columnas									
	200 1	400 2	600 3	800 4	1000 5	1200 6	1400 7	1600 8	1800 9	2000 10
500										
600										
800		435								
1000										
1200		601								
1400										
1600		761								
1800										
2000		919								
2200										
2400		1078								

**Resa termica
Thermal power
Rendimiento térmico
w/ t 50°K EN 442**

